

**Features**

**Accurate and reliable heat detection for protection of property\*\***

**UL listed to Standard 521 as a rate compensated heat detector**

**Fixed temperature operation is suitable for most applications:**

- Thermistor based design is inherently rate compensated due to minimal thermal lag
- Available for 135° F (57° C) or 200° F (93° C)
- UL spacing distance is 70 ft (21.3 m)

**Available with rate-of-rise temperature detection:**

- Dual thermistor rate-of-rise operation
- For use where anticipated ambient temperature changes are less than 6° F/minute (3.33° C/minute)
- UL spacing distance is 70 ft (21.3 m)

**E-Series provides:**

- Epoxy encapsulated electronic detector design with gold plated contacts, high humidity thermistor, and stainless steel screws
- Operation for ceiling or wall mounting
- Easily tested, self-restoring operation with repeatable accuracy
- Alarm indicating LED located on detector
- Current limited alarm that is compatible with two wire initiating device circuits (IDCs)
- Designed for EMI compatibility

**Optional remote alarm indicating LED**

**Available base options:**


- Bases for 2-wire or 4-wire operation
- Auxiliary relay output (refer to selection chart on page 2 for relay ratings)
- Remote alarm indicating LED output

**Description**
**Accurate Electronic Design**

Autocall electronic heat detectors use a fast response, thermistor based design to provide temperature sensing that quickly, accurately, and consistently identifies when fixed temperatures are exceeded. The fixed temperature sensing thermistor readily tracks the local ambient temperature. This eliminates the time required to melt a lead pellet or heat a bimetallic element as occurs in mechanical heat detector designs and provides the required heat detection for most applications.

**Rate-of-rise detection**

Rate-of-rise detection is determined by comparing two thermistor responses. By combining accurate thermistors with proper physical placement, this patented rate-of-rise detection design achieves a high level of performance not normally available with mechanical detection.

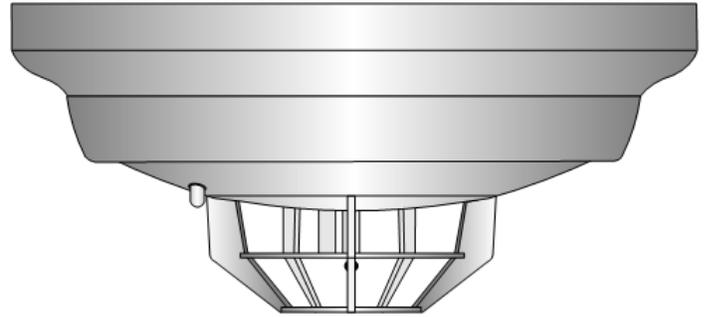**Specifications**


**Fig 1: E-Series Electronic Heat Detector Mounted in Base**

Specification	Rating
<b>Voltage</b>	15 to 32 VDC (filtered DC with 30% maximum ripple)
<b>Standby Current</b>	80 µA typical, 100 µA maximum
<b>Alarm Current, 2-Wire Operation</b>	Up to 86 mA maximum, exact current is determined by alarm current limiting of connected IDC
<b>Alarm Current, 4-Wire Operation</b>	24 mA typical @ 24 VDC
<b>Rate-of-Rise Operation</b>	Meets FM requirements for operation between 15° and 25° F/min (8.33° and 13.88° C/min)
<b>Color</b>	Frost-White
<b>Dimensions</b>	Refer to diagram on page 3
<b>Environmental Operating Range</b>	Suitable for covered outdoor applications within the ambient conditions stated below
<b>Humidity Range</b>	10% to 95% RH from 32° to 122° F (0° to 50° C)

**Table 1: Ambient Temperature Operating Range**

Specification	Rating
135° F Models	32° to 100° F (0° to 38° C)
200° F Models	32° to 150° F (0° to 66° C)

**WARNING:** \*\* In most fires, hazardous levels of smoke and toxic gas can build up before a heat detection device would initiate an alarm. In cases where Life Safety is a factor, the use of smoke detection is highly recommended.

\* Additional listings may be applicable; contact your local product supplier for the latest status.

### Applications Reference

Heat detectors are used where property protection is desired and where life safety protection is not required or is performed by other equipment. Typical heat detector applications are satisfied by use of these fixed temperature electronic detectors.

The addition of rate-of-rise operation provides two forms of heat detection for use where temperature fluctuations are controlled and are less than 6° F/min (3.33° C/min). Where temperatures may fluctuate more quickly, use fixed temperature detection.

Refer to NFPA 72, the National Fire Alarm Code and publication 574-709AC, A4098 Detectors, Sensors, and Bases Application Manual, for additional guidance in applying and locating heat detectors.

### E-Series Products

E-Series electronic heat detectors are similar to standard Autocall indoor electronic heat detectors but are equipped with gold plated contacts, a high humidity thermistor, and stainless steel screws. For indoor heat detector applications, refer to data sheet **AC4098-0014**.

### Alarm Indicating LED Operation

The heat detector LED turns ON continuously when in alarm. During normal conditions the LED is OFF.

### Fixed Temperature Guidelines

**135° F (57° C)** fixed temperature detectors are for normal temperatures that do not exceed 100° F (38° C).

**200° F (93° C)** fixed temperature detectors are for normal temperatures that exceed 100° F (38° C) but are less than 150° F (66° C).

### Alarm Verification Application Note

When connecting these electronic heat detectors to a 2-wire initiating device circuit (IDC) that is providing Alarm Verification for smoke detectors, use the A4098-9682E, 4-wire base. The 4-wire base provides an alarm contact that is not current-limited. (Heat detectors in the 2-wire base present a current-limited alarm condition that is not compatible with Alarm Verification. Initiating devices other than smoke detectors are required to activate the alarm without starting the alarm verification cycle.)

### Heat Detector Selection Chart (compatible with bases listed below)

SKU	Fixed Temperature Operation at	Rate-of-Rise Operation	Fm Ratings		UI & Ulc Maximum Spacing
			Maximum Spacing	RTI (Response Time Index)	
A4098-9612E	135° F (57° C)	Not applicable	20 ft x 20 ft (6.1 m x 6.1 m)	Quick	70 ft x 70 ft (21.3 m x 21.3 m)
A4098-9614E	200° F (93° C)				
A4098-9613E	135° F (57° C)	Between 15° & 25° F/min (8.33° & 13.88° C/min)	20 ft x 20 ft (6.1 m x 6.1 m)	Quick	
A4098-9615E	200° F (93° C)		50 ft x 50 ft (15.2 m x 15.2 m)	Ultra Fast	

### Heat Detector Base Selection Chart

SKU	Description	Connection	Details
A4098-9788E	2-Wire Base, no options	IDC connections	Screw terminals for in/out wiring, 18 to 14 AWG
A4098-9684E	2-Wire Base with connection for remote LED alarm indicator	IDC connections	Screw terminals for 18 to 14 AWG for in/out wiring of zone (+), color coded 18 AWG leads for in/out wiring of zone (-)
		LED connections	Color coded 18 AWG leads
A4098-9683E	2-Wire Base with auxiliary alarm relay output <b>Note:</b> Must be connected as the only device on the IDC to ensure relay operation.	Relay Operation Type	Relay Ratings
		Power-limited	1 A @ 28 VDC
		Nonpower-limited	3 A @ 120 AC
		Output Type	Wiring Connections
		IDC connections	Screw terminals for 18 to 14 AWG for in/out wiring of zone (+), color coded 18 AWG leads for in/out wiring of zone (-)
		Relay connections	Color coded 18 AWG leads
A4098-9682E	4-Wire Base with auxiliary alarm relay output NOTE: Requires separate 24 VDC power.	Relay Operation Type	Relay Ratings
		Power-limited	3 A @ 28 VDC
		Nonpower limited	3 A @ 120 AC
		Output Type	Wiring Connections
		IDC connections	Color coded 18 AWG leads for in/out wiring
		Relay connections	Color coded 18 AWG leads
		Power connections	Screw terminals for 18 to 14 AWG for in/out wiring of power (+), color coded 18 AWG leads for in/out wiring of power (-)

Metric wire equivalents: 18 AWG = 0.82 mm<sup>2</sup>; 14 AWG = 2.08 mm<sup>2</sup>

### Heat Detector Accessories

SKU	Description	Details	Base Compatibility
4098-9832	Adapter Plate	Required for surface or semi-flush mounting to 4" (102 mm) square electrical box or for surface mounting to 4" octagonal box	A4098-9682E A4098-9683E
		May also be used when retrofitting to replace existing larger diameter bases	A4098-9684E A4098-9788E
A4098-9830	Remote Red LED Alarm Indicator	Mounted on single gang stainless steel plate, wiring connections are 18 AWG color coded leads	A4098-9684E only
A2098-9739	End-of-Line Relay	Epoxy encapsulated design, 24 VDC operation, wiring connections are 18 AWG color coded leads	For 4-wire IDCs using A4098-9682E base, one per circuit
A2098-9735	End-of-Line Relay	Mounted on single gang stainless steel plate, 24 VDC operation, wiring connections are 18 AWG color coded leads	

Metric wire equivalent: 18 AWG = 0.82 mm<sup>2</sup>

Dimensions and Reference

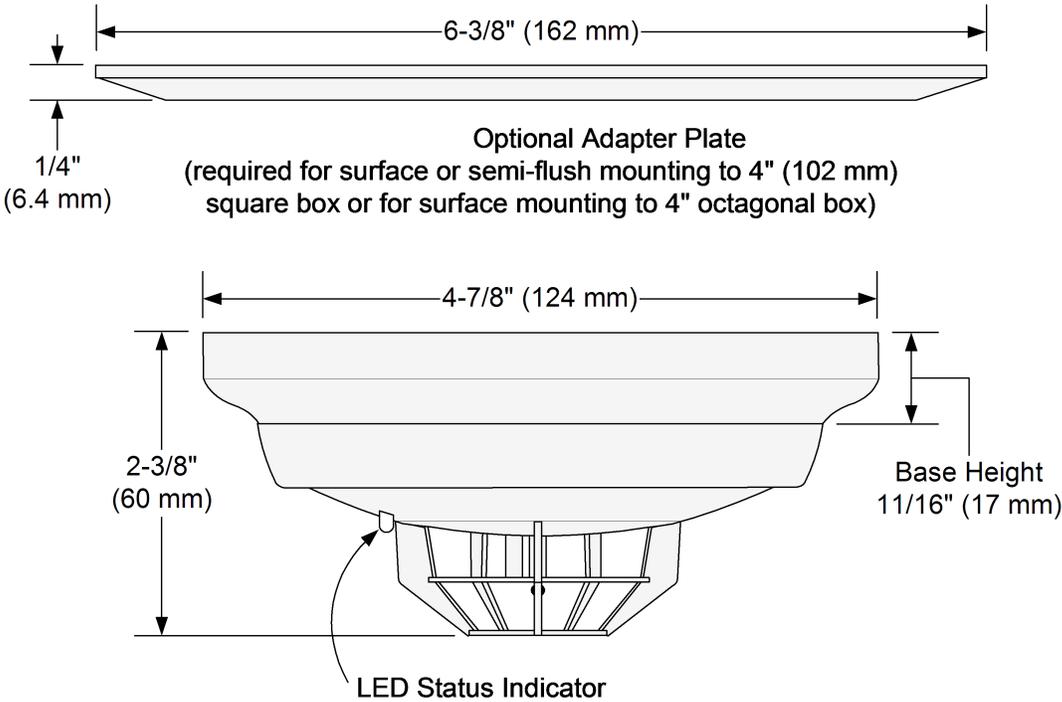


Fig 2: Dimensions

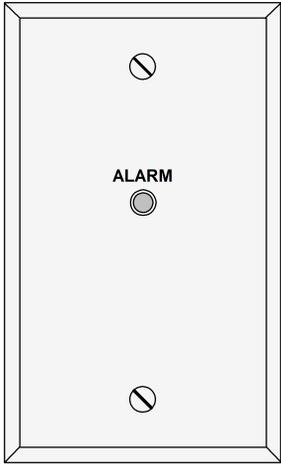


Fig 3: A4098-9830 Remote Red Led Alarm Indicator (not to scale)

## Mounting Information

Base	Electrical Box Requirements
A4098-9788E	4" (102 mm) octagonal or 4" square box, 1-1/2" deep (38 mm) Single gang box, 2" deep (51 mm)
A4098-9682E A4098-9683E A4098-9684E	4" octagonal or 4" square box, 1-1/2" deep with 1-1/2" deep extension ring (see diagram below)

## Applications Reference

The following table provides a reference for the maximum rectangular area covered for detectors rated with the given spacing. For additional information, including consideration of ceiling height, refer to NFPA 72, the National Fire Alarm Code.

**Table 2: Maximum Rectangular Area Dimensions for Single Detector Coverage**

20 ft Rated Spacing (6.1 m)	50 ft Rated Spacing (15.2 m)	70 ft Rated Spacing (21.3 m)
20 ft x 20 ft (6.1 m x 6.1 m)	50 ft x 50 ft (15.2 m x 15.2 m)	70 ft x 70 ft (21.3 m x 21.3 m)
15 ft x 23.9 ft (4.5 m x 7.2 m)	45 ft x 54.5 ft (13.7 m x 16.6 m)	65 ft x 74.6 ft (19.8 m x 22.7 m)
10 ft x 26.4 ft (3 m x 8 m)	40 ft x 58.2 ft (12.1 m x 17.7 m)	60 ft x 78.7 ft (18.3 m x 24 m)
5 ft x 27.8 ft (1.5 m x 8.4 m)	35 ft x 61.4 ft (10.6 m x 18.7 m)	55 ft x 82.3 ft (16.7 m x 25 m)
1 ft x 28.2 ft (0.3 m x 8.5 m)	30 ft x 64 ft (9.1 m x 19.5 m)	50 ft x 85.4 ft (15.2 m x 26 m)
	25 ft x 66.1 ft (7.6 m x 20.1 m)	45 ft x 88.1 ft (13.7 m x 26.8 m)
	20 ft x 67.8 ft (6.1 m x 20.6 m)	40 ft x 90.5 ft (12.2 m x 27.5 m)
	15 ft x 69 ft (4.5 m x 21 m)	35 ft x 92.6 ft (10.6 m x 28.2 m)
	10 ft x 69.9 ft (3.5 m x 21.3 m)	30 ft x 94.3 ft (9.1 m x 28.7 m)
	5 ft x 70.5 ft (1.5 m x 21.4 m)	25 ft x 95.7 ft (7.6 m x 29.1 m)
	1 ft x 70.6 ft (0.3 m x 21.5 m)	20 ft x 96.9 ft (6.1 m x 29.5 m)
		15 ft x 97.8 ft (4.5 m x 29.8 m)
		10 ft x 98.4 ft (3.05 m x 30 m)
		5 ft x 98.8 ft (1.5 m x 30.1 m)
		1 ft x 99 ft (0.3 m x 30.2 m)

